



**HIRE
HOISTS
SALES
SERVICING
TRAINING**



Rapid
PLATFORMS



THE OLDEST INDEPENDENT ACCESS COMPANY IN THE UK

**SCISSOR
LIFTS**
PAGE 6 - 11



**MAST
LIFTS**
PAGE 12 - 13



**BOOM
LIFTS**
PAGE 14 - 21



**TRUCK
MOUNTS**
PAGE 22 - 27



**TRACK
MOUNTS**
PAGE 28 - 31



**HOISTS &
ACCESSORIES**
PAGE 32 - 35



TRAINING, SALES & SERVICE/ MAINTENANCE

We can provide you with all your working at height training needs, as well as other industry specific training such as NEBOSH, IOSH and CITB. We can even help support you after you've purchased your machine or hoist. We offer after sales servicing, repairs and LOLER inspections as well as thorough examinations to make sure your machine is up to standard. Get in touch with us for more information and for service advice for your machine.

**WORKING
AT HEIGHT
TRAINING**
PAGE 36 - 37



**SAFETY
RELATED
TRAINING**
PAGE 38 - 39



**SALES &
SERVICE/
MAINTENANCE**
PAGE 40 - 43

SCISSOR LIFTS


ELECTRIC & DIESEL



S19E 7.80m

REACH HEIGHT	7.80m	PLATFORM HEIGHT	5.80m
CLOSED LENGTH	1.78m	CLOSED HEIGHT	1.99m
WIDTH	0.81m	PLATFORM EXTENSION	0.90m
CAGE DIMENSIONS	1.63x0.66m	MINIMUM HEIGHT*	1.64m
LIFTING CAPACITY	227kg	WEIGHT	1,170kg
POWER	ELECTRIC	IPAF CATEGORY	3a


FEATURED MODEL: SKYJACK SJ3219
 ALTERNATIVE MODELS: GENIE GS1932, JLG 1930

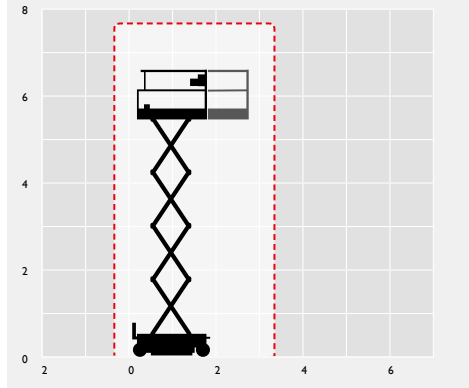

S26E 9.90m

REACH HEIGHT	9.90m	PLATFORM HEIGHT	7.90m
CLOSED LENGTH	2.31m	CLOSED HEIGHT	2.15m
WIDTH	1.17m	PLATFORM EXTENSION	1.20m
CAGE DIMENSIONS	2.13x1.07m	MINIMUM HEIGHT*	1.79m
LIFTING CAPACITY	454kg	WEIGHT	2,132kg
POWER	ELECTRIC	IPAF CATEGORY	3a


FEATURED MODEL: SKYJACK SJ4626
 ALTERNATIVE MODEL: GENIE GS2646

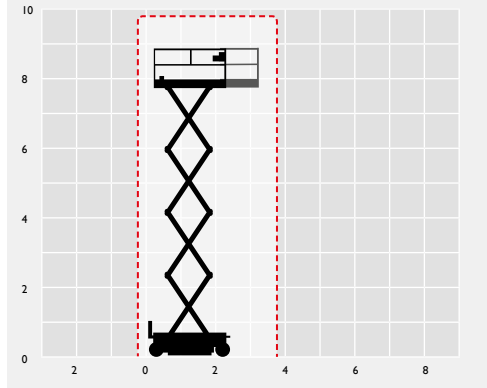

S26NE 9.90m

REACH HEIGHT	9.90m	PLATFORM HEIGHT	7.90m
CLOSED LENGTH	2.32m	CLOSED HEIGHT	2.15m
WIDTH	0.81m	PLATFORM EXTENSION	0.90m
CAGE DIMENSIONS	2.13x0.71m	MINIMUM HEIGHT*	1.79m
LIFTING CAPACITY	227kg	WEIGHT	1,880kg
POWER	ELECTRIC	IPAF CATEGORY	3a


FEATURED MODEL: SKYJACK SJ3226
 ALTERNATIVE MODELS: GENIE GS2632, JLG 2630

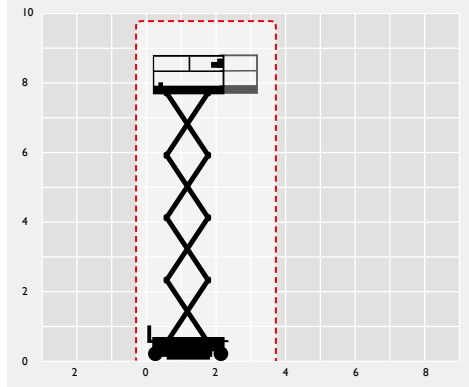

S32E 11.80m

REACH HEIGHT	11.80m	PLATFORM HEIGHT	9.80m
CLOSED LENGTH	2.31m	CLOSED HEIGHT	2.24m
WIDTH	1.71m	PLATFORM EXTENSION	1.20m
CAGE DIMENSIONS	2.13x1.07m	MINIMUM HEIGHT*	1.88m
LIFTING CAPACITY	318kg	WEIGHT	2,313kg
POWER	ELECTRIC	IPAF CATEGORY	3a


FEATURED MODEL: SKYJACK SJ4632
 ALTERNATIVE MODELS: GENIE GS3246, JLG 3246

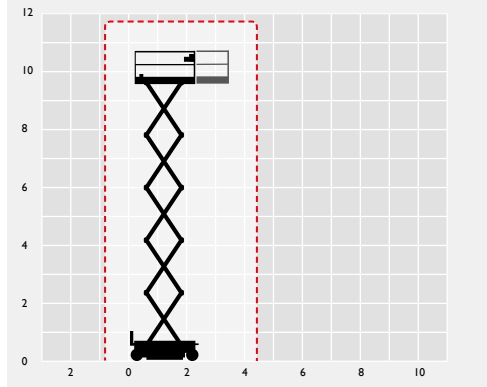

* Minimum height reference to stowed height with guardrails down where applicable. The information provided is for guidance only. It may change at any time in accordance with manufacturer's specification.


S39NE 14.00m

REACH HEIGHT	14.00m	PLATFORM HEIGHT	12.00m
CLOSED LENGTH	2.30m	CLOSED HEIGHT	2.50m
WIDTH	1.20m	PLATFORM EXTENSION	0.92m
CAGE DIMENSIONS	2.30x1.20m	MINIMUM HEIGHT*	2.08m
LIFTING CAPACITY	350kg	WEIGHT	3,170kg
POWER	ELECTRIC	IPAF CATEGORY	3a
FEATURED MODEL	ALTERNATIVE MODEL		
HAULOTTE COMPACT 14	GENIE GS4047		

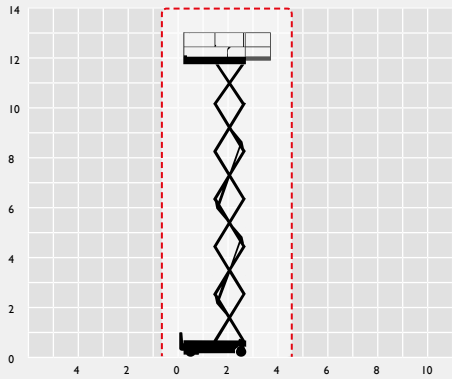


S55NE 18.50m

REACH HEIGHT	18.50m	PLATFORM HEIGHT	16.50m
CLOSED LENGTH	3.74m	CLOSED HEIGHT	3.40m
WIDTH	1.20m	PLATFORM EXTENSION	1.50m
CAGE DIMENSIONS	3.38x1.16m	MINIMUM HEIGHT*	2.78m
LIFTING CAPACITY	500kg	WEIGHT	7,985kg
POWER	ELECTRIC	IPAF CATEGORY	3a
FEATURED MODEL	ALTERNATIVE MODEL		
HOLLANLIFT N-165EL-12			

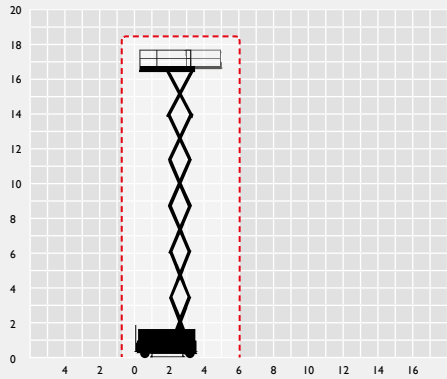


S19D 7.80m

REACH HEIGHT	7.80m	PLATFORM HEIGHT	5.80m
CLOSED LENGTH	1.93m	CLOSED HEIGHT	2.52m
WIDTH	1.30m	PLATFORM EXTENSION	0.86m
CAGE DIMENSIONS	1.47x0.71m	MINIMUM HEIGHT*	1.64m
LIFTING CAPACITY	250kg	WEIGHT	1,990kg
POWER	DIESEL	IPAF CATEGORY	3a
FEATURED MODEL	ALTERNATIVE MODEL		
ALMAC BIBI			

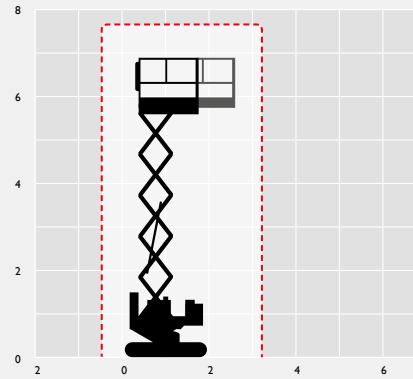


S59NES 20.00m

REACH HEIGHT	20.00m	PLATFORM HEIGHT	18.00m
CLOSED LENGTH	4.12m	CLOSED HEIGHT	3.96m
WIDTH	1.20m	PLATFORM EXTENSION	1.28m
CAGE DIMENSIONS	3.91x1.16m	MINIMUM HEIGHT*	2.85m
LIFTING CAPACITY	500kg	WEIGHT	7,800kg
POWER	ELECTRIC	IPAF CATEGORY	3a
FEATURED MODEL	ALTERNATIVE MODEL		
JLG LIFTLUX 180-12			

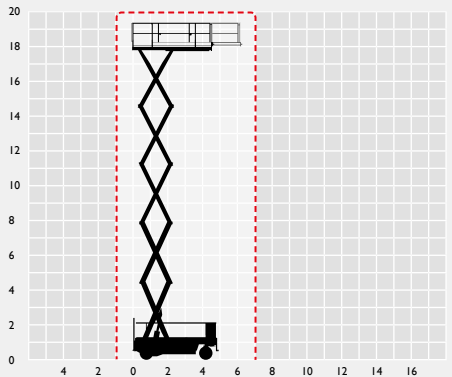


S64NES 21.40m

REACH HEIGHT	21.40m	PLATFORM HEIGHT	19.40m
CLOSED LENGTH	3.74m	CLOSED HEIGHT	3.74m
WIDTH	1.20m	PLATFORM EXTENSION	1.50m
CAGE DIMENSIONS	3.38x1.16m	MINIMUM HEIGHT*	3.04m
LIFTING CAPACITY	500kg	WEIGHT	9,120kg
POWER	ELECTRIC	IPAF CATEGORY	3a
FEATURED MODEL	ALTERNATIVE MODEL		
HOLLANLIFT N-195EL-12	HOLLANLIFT HL220E		

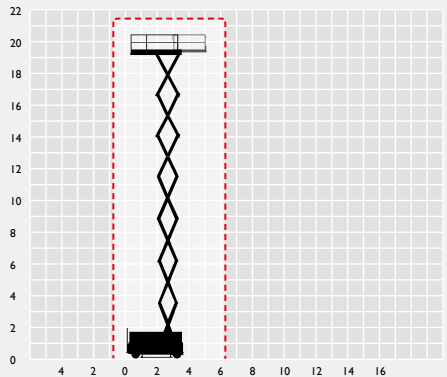

S26DX 9.90m

REACH HEIGHT	9.90m	PLATFORM HEIGHT	7.90m
CLOSED LENGTH	2.70m	CLOSED HEIGHT	2.40m
WIDTH	1.70m	PLATFORM EXTENSION	1.50m
CAGE DIMENSIONS	2.40x1.40m	MINIMUM HEIGHT*	1.60m
LIFTING CAPACITY	567kg	WEIGHT	2,926kg
POWER	DIESEL	IPAF CATEGORY	3a
FEATURED MODEL	ALTERNATIVE MODELS		
SKYJACK SJ6826RT	HAULOTTE COMPACT10 GENIE GS2668RT		

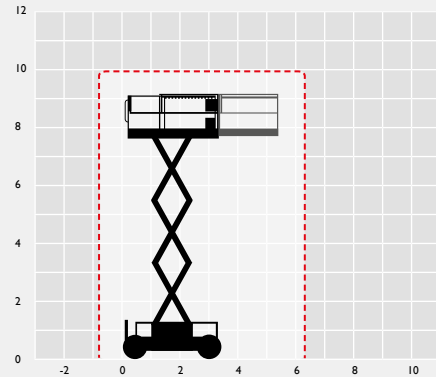


* Minimum height reference to stowed height with guardrails down where applicable. The information provided is for guidance only. It may change at any time in accordance with manufacturer's specification.

S32DX 11.80m

REACH HEIGHT	11.80m	PLATFORM HEIGHT	9.80m
CLOSED LENGTH	2.70m	CLOSED HEIGHT	2.50m
WIDTH	1.70m	PLATFORM EXTENSION	1.50m
CAGE DIMENSIONS	2.40x1.40m	MINIMUM HEIGHT*	1.80m
LIFTING CAPACITY	454kg	WEIGHT	3,497kg
POWER	DIESEL	IPAF CATEGORY	3a


FEATURED MODEL SKYJACK SJ6832RT
ALTERNATIVE MODEL HAULOTTE COMPACT I2

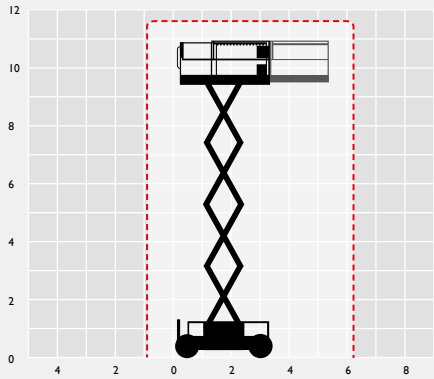

S41D 14.50m

REACH HEIGHT	14.50m	PLATFORM HEIGHT	12.50m
CLOSED LENGTH	3.49m	CLOSED HEIGHT	2.90m
WIDTH	2.21m	PLATFORM EXTENSION	1.22m
CAGE DIMENSIONS	3.51x1.78m	MINIMUM HEIGHT*	2.22m
LIFTING CAPACITY	681kg	WEIGHT	5,402kg
POWER	DIESEL	IPAF CATEGORY	3a


FEATURED MODEL SKYJACK SJ8841

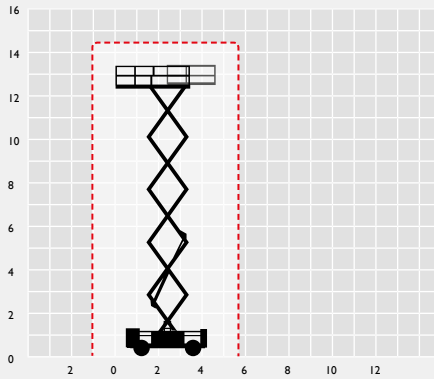

S67D 22.30m

REACH HEIGHT	22.30m	PLATFORM HEIGHT	20.30m
CLOSED LENGTH	4.80m	CLOSED HEIGHT	4.06m
WIDTH	2.40m	PLATFORM EXTENSION	2.40m
CAGE DIMENSIONS	4.35x2.30m	MINIMUM HEIGHT*	2.96m
LIFTING CAPACITY	750kg	WEIGHT	11,400kg
POWER	DIESEL	IPAF CATEGORY	3a


FEATURED MODEL JLG LIFTLUX 203-24

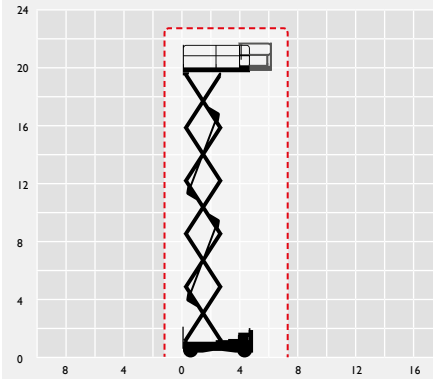

S80D 26.50m

REACH HEIGHT	26.50m	PLATFORM HEIGHT	24.50m
CLOSED LENGTH	5.74m	CLOSED HEIGHT	4.26m
WIDTH	2.50m	PLATFORM EXTENSION	1.81m
CAGE DIMENSIONS	2.50x5.35m	MINIMUM HEIGHT*	3.16m
LIFTING CAPACITY	750kg	WEIGHT	16,300kg
POWER	DIESEL	IPAF CATEGORY	3a


FEATURED MODEL JLG LIFTLUX 245-25

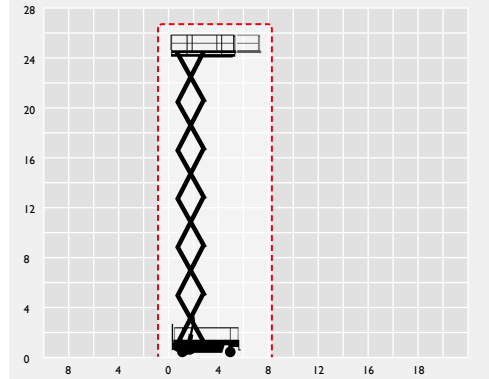

S50D 17.20m

REACH HEIGHT	17.20m	PLATFORM HEIGHT	15.20m
CLOSED LENGTH	4.47	CLOSED HEIGHT	3.16m
WIDTH	2.34	PLATFORM EXTENSION	1.52m
CAGE DIMENSIONS	4.27x1.88m	MINIMUM HEIGHT*	2.29m
LIFTING CAPACITY	681kg	WEIGHT	6,577kg
POWER	DIESEL	IPAF CATEGORY	3a


FEATURED MODEL SKYJACK SJ9250
ALTERNATIVE MODEL GENIE GSS390

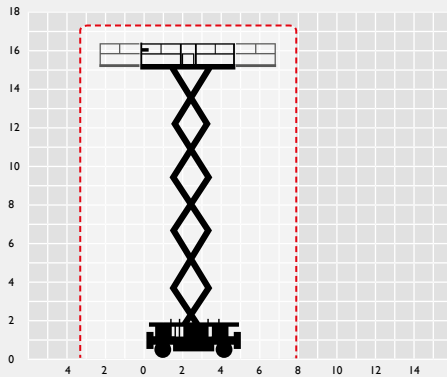

S64D 21.50m

REACH HEIGHT	21.50m	PLATFORM HEIGHT	19.50m
CLOSED LENGTH	4.74m	CLOSED HEIGHT	3.65m
WIDTH	2.44m	PLATFORM EXTENSION	1.80m
CAGE DIMENSIONS	4.37x2.30m	MINIMUM HEIGHT*	2.88m
LIFTING CAPACITY	500kg	WEIGHT	12,400kg
POWER	DIESEL	IPAF CATEGORY	3a


FEATURED MODEL HOLLANDLIFT HL195
ALTERNATIVE MODEL HOLLANDLIFT HL220

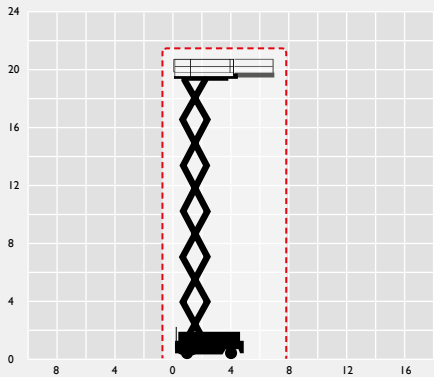

S85D 27.20m

REACH HEIGHT	27.20m	PLATFORM HEIGHT	25.20m
CLOSED LENGTH	6.15m	CLOSED HEIGHT	3.89m
WIDTH	2.50m	PLATFORM EXTENSION	2.10m
CAGE DIMENSIONS	2.50x6.15m	MINIMUM HEIGHT*	3.89m
LIFTING CAPACITY	1000kg	WEIGHT	21,910kg
POWER	DIESEL	IPAF CATEGORY	3a


FEATURED MODEL COMBISTAR HL-275

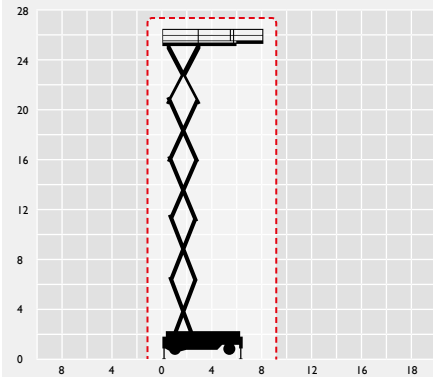

S104D 33.70m

REACH HEIGHT	33.70m	PLATFORM HEIGHT	31.70m
CLOSED LENGTH	7.02m	CLOSED HEIGHT	3.63m
WIDTH	2.98m	PLATFORM EXTENSION	3.00m
CAGE DIMENSIONS	6.66x2.80m	MINIMUM HEIGHT*	2.87m
LIFTING CAPACITY	1000kg	WEIGHT	31,200kg
POWER	DIESEL	IPAF CATEGORY	3a

FEATURED MODEL HOLLANDLIFT MEGASTAR G-320

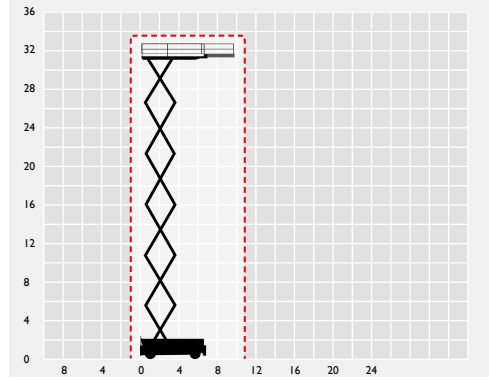

* Minimum height reference to stowed height with guardrails down where applicable. The information provided is for guidance only. It may change at any time in accordance with manufacturer's specification.

MAST LIFTS


ELECTRIC



BM10E 4.90m

REACH HEIGHT	4.90m	PLATFORM HEIGHT	2.90m
CLOSED LENGTH	1.22m	CLOSED HEIGHT	1.69m
WIDTH	0.76m	TURNING RADIUS	1.05m
LIFTING CAPACITY	180kg	PLATFORM EXTENSION	0.59m
CAGE DIMENSIONS	0.68x1.12m	WEIGHT	450kg
POWER	ELECTRIC	IPAF CATEGORY	3a


FEATURED MODEL
BRAVI LEONARDO

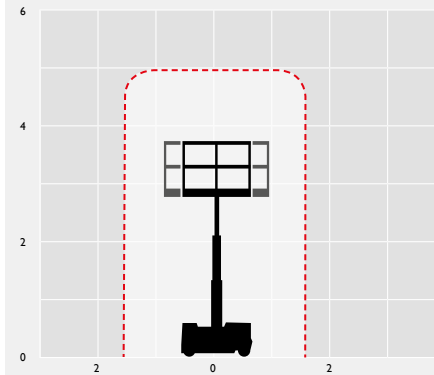

BM12E 5.48m

REACH HEIGHT	5.48m	PLATFORM HEIGHT	3.48m
CLOSED LENGTH	1.35m	CLOSED HEIGHT	1.57m
WIDTH	0.75m	WEIGHT	717kg
LIFTING CAPACITY	227kg	IPAF CATEGORY	3a
CAGE DIMENSIONS	0.75x0.89m	POWER	ELECTRIC


FEATURED MODEL
GENIE GR12

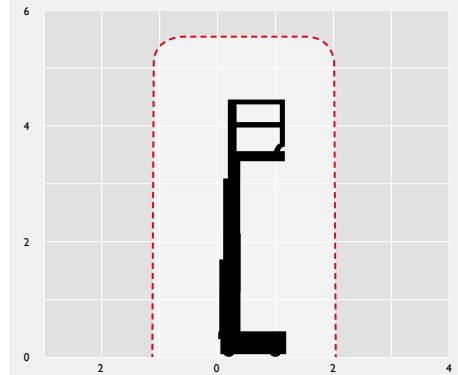

BM16E 6.47m

REACH HEIGHT	6.47m	PLATFORM HEIGHT	4.47m
CLOSED LENGTH	1.35m	CLOSED HEIGHT	1.57m
WIDTH	0.75m	WEIGHT	994kg
LIFTING CAPACITY	227kg	IPAF CATEGORY	3a
CAGE DIMENSIONS	0.75x0.89m	POWER	ELECTRIC


FEATURED MODEL
GENIE GR15

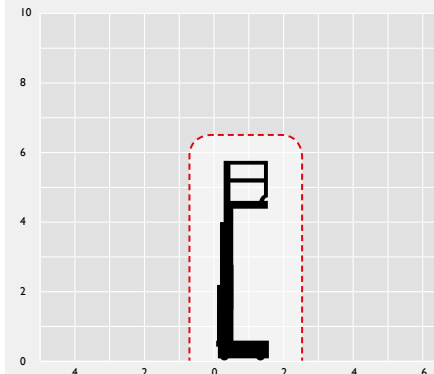

BMJ26E 10.00m

REACH HEIGHT	10.00m	PLATFORM HEIGHT	8.00m
CLOSED LENGTH	2.61m	CLOSED HEIGHT	1.99m
WIDTH	0.99m	TURNING RADIUS	1.87m
LIFTING CAPACITY	230kg	WEIGHT	2,575kg
ROTATION	360°	HORIZONTAL REACH	3.10m
CAGE DIMENSIONS	0.67x0.97m	IPAF CATEGORY	3b
POWER	ELECTRIC		

FEATURED MODEL
HAULOTTE STAR 10

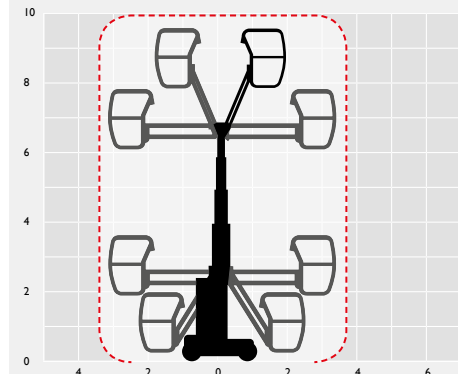

BOOM LIFTS


ELECTRIC, DIESEL,
BI-ENERGY



BA26ES 10.00m

REACH HEIGHT	10.00m	PLATFORM HEIGHT	8.00m
CLOSED LENGTH	4.25m	CLOSED HEIGHT	1.96m
WIDTH	1.50m	HORIZONTAL REACH	4.50m
LIFTING CAPACITY	200kg	WEIGHT	1,930kg
CAGE DIMENSIONS	0.60x1.10m	TURNING RADIUS	4.22m
ROTATION	360°	IPAF CATEGORY	3b
POWER	ELECTRIC		


FEATURED MODEL
NIFTYLIFT HR10 (SIOPS)

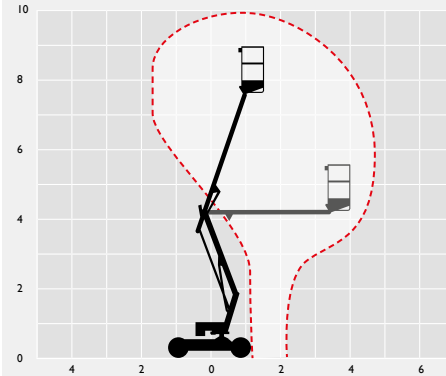

BA30NE 10.89m

REACH HEIGHT	10.89m	PLATFORM HEIGHT	8.89m
CLOSED LENGTH	5.31m	CLOSED HEIGHT	2.00m
WIDTH	1.19m	HORIZONTAL REACH	6.25m
LIFTING CAPACITY	227kg	WEIGHT	6,450kg
CAGE DIMENSIONS	0.76x1.22m	TURNING RADIUS	3.20m
ROTATION	355°	IPAF CATEGORY	3b
POWER	ELECTRIC		

FEATURED MODEL
GENIE Z30/20J

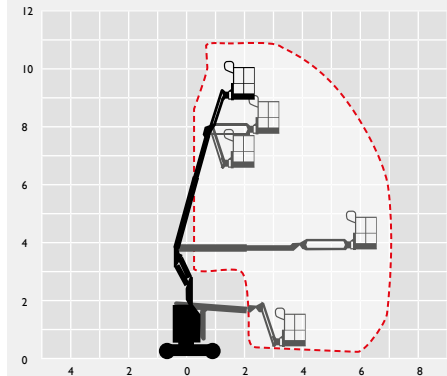


BA45E 15.92m

REACH HEIGHT	15.92m	PLATFORM HEIGHT	13.92m
CLOSED LENGTH	6.70m	CLOSED HEIGHT	2.00m
WIDTH	1.75m	HORIZONTAL REACH	7.65m
LIFTING CAPACITY	227kg	WEIGHT	6,867kg
CAGE DIMENSIONS	0.67x1.83m	TURNING RADIUS	4.26m
ROTATION	355°	IPAF CATEGORY	3b
POWER	ELECTRIC		

FEATURED MODEL
GENIE Z45/25J

ALTERNATIVE MODEL
JLG E450AJ

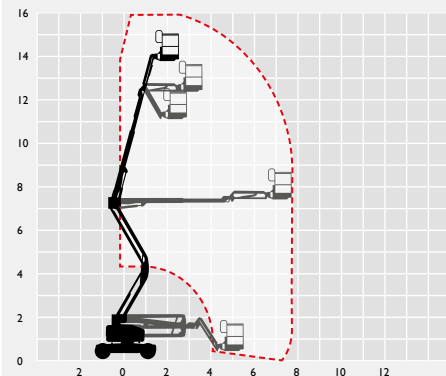


BA45DS 15.72m

REACH HEIGHT	15.72m	PLATFORM HEIGHT	13.72m
CLOSED LENGTH	6.53m	CLOSED HEIGHT	2.30m
WIDTH	1.98m	HORIZONTAL REACH	7.47m
LIFTING CAPACITY	230kg	WEIGHT	7,100kg
CAGE DIMENSIONS	0.76x1.83m	TURNING RADIUS	4.27m
ROTATION	360°	IPAF CATEGORY	3b
POWER	DIESEL		

FEATURED MODEL
JLG 450AJ

ALTERNATIVE MODELS
HAULOTTE HA16PX*
GENIE Z45/25RTJ
SKYJACK SJ46AJ

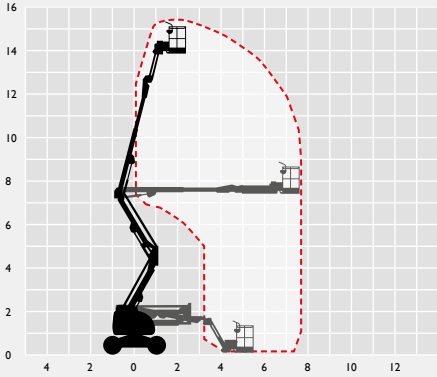

BA61DS 20.29m

REACH HEIGHT	20.29m	PLATFORM HEIGHT	18.29m
CLOSED LENGTH	8.82m	CLOSED HEIGHT	2.56m
WIDTH	2.44m	HORIZONTAL REACH	12.12m
LIFTING CAPACITY	227kg	WEIGHT	10,650kg
CAGE DIMENSIONS	0.91x1.83m	TURNING RADIUS	3.55m
ROTATION	360°	IPAF CATEGORY	3b
POWER	DIESEL		

FEATURED MODEL
JLG 600AJ


ALTERNATIVE MODELS
HAULOTTE HA20PX*
GENIE Z60/34*



BA104DS 31.80m

REACH HEIGHT	31.80m	PLATFORM HEIGHT	29.80m
CLOSED LENGTH	11.20m	CLOSED HEIGHT	2.70m
TRANSPORT WIDTH	2.50m	WORKING WIDTH	3.33m
LIFTING CAPACITY	250kg	HORIZONTAL REACH	21.30m
CAGE DIMENSIONS	0.80x2.44m	WEIGHT	21,100kg
ROTATION	360°	IPAF CATEGORY	3b
POWER	DIESEL		


FEATURED MODEL
HAULOTTE HA32PX

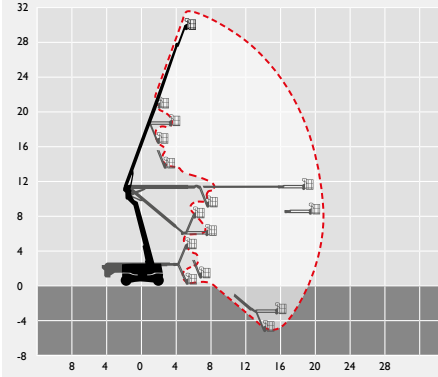

BA125DS 40.10m

REACH HEIGHT	40.10m	PLATFORM HEIGHT	38.10m
CLOSED LENGTH	11.45m	CLOSED HEIGHT	3.05m
TRANSPORT WIDTH	2.49m	WORKING WIDTH	3.81m
LIFTING CAPACITY	227kg	HORIZONTAL REACH	19.25m
CAGE DIMENSIONS	0.91x2.44m	WEIGHT	19,958kg
ROTATION	360°	TURNING RADIUS	6.86m
POWER	DIESEL	IPAF CATEGORY	3b

FEATURED MODEL
JLG 1250AJP

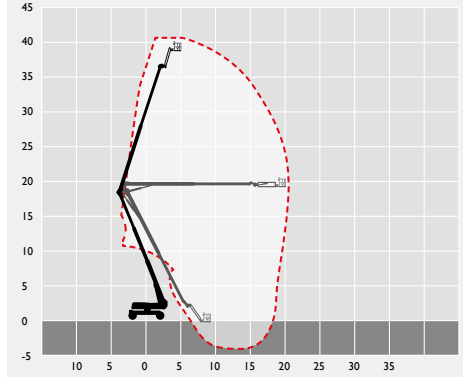


BA63DS 21.21m

REACH HEIGHT	21.21m	PLATFORM HEIGHT	19.21m
CLOSED LENGTH	9.14m	CLOSED HEIGHT	2.54m
WIDTH	2.44m	HORIZONTAL REACH	12.19m
LIFTING CAPACITY	227kg	WEIGHT	9,616kg
CAGE DIMENSIONS	0.91x2.40m	TURNING RADIUS	5.31m
ROTATION	360°	IPAF CATEGORY	3b
POWER	DIESEL		

FEATURED MODEL
SKYJACK SJ63AJ

ALTERNATIVE MODEL
NIFTYLIFT HR21

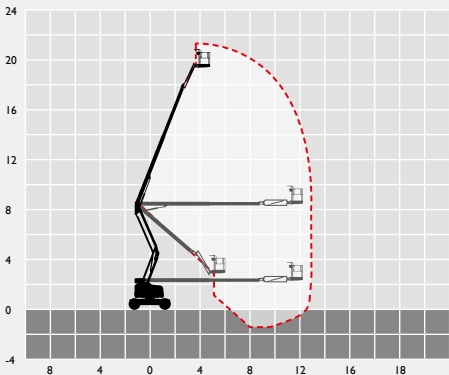

BA80DS 26.38m

REACH HEIGHT	26.38m	PLATFORM HEIGHT	24.38m
CLOSED LENGTH	11.12m	CLOSED HEIGHT	3.00m
WIDTH	2.44m	HORIZONTAL REACH	15.74m
LIFTING CAPACITY	230kg	WEIGHT	15,030kg
CAGE DIMENSIONS	0.91x2.44m	TURNING RADIUS	4.42m
ROTATION	360°	IPAF CATEGORY	3b
POWER	DIESEL		

FEATURED MODEL
JLG 800AJ


ALTERNATIVE MODEL
HAULOTTE HA26PX*



BA135DS 43.15m

REACH HEIGHT	43.15m	PLATFORM HEIGHT	41.15m
CLOSED LENGTH	12.93m	CLOSED HEIGHT	3.09m
TRANSPORT WIDTH	2.49m	WORKING WIDTH	5.03m
LIFTING CAPACITY	272kg	HORIZONTAL REACH	21.26m
CAGE DIMENSIONS	0.91x2.44m	WEIGHT	20,502kg
ROTATION	360°	TURNING RADIUS	8.56m
POWER	DIESEL	IPAF CATEGORY	3b

FEATURED MODEL
GENIE Z135/70

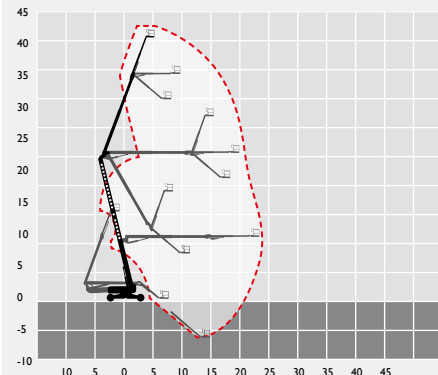


* Model not fitted with electronic secondary guarding.
The information provided is for guidance only. It may change at any time in accordance with manufacturer's specification.

BA34NBS 12.20m

REACH HEIGHT	12.20m	PLATFORM HEIGHT	10.20m
CLOSED LENGTH	4.10m	CLOSED HEIGHT	1.90m
WIDTH	1.50m	HORIZONTAL REACH	6.10m
LIFTING CAPACITY	200kg	WEIGHT	2,950kg
CAGE DIMENSIONS	0.65x1.10m	TURNING RADIUS	4.20m
ROTATION	360°	IPAF CATEGORY	3b


POWER **BI-ENERGY**
 FEATURED MODEL NIFTYLIFT HR12 (SIOPS) ALTERNATIVE MODELS NIFTYLIFT HR12 & HR12RT

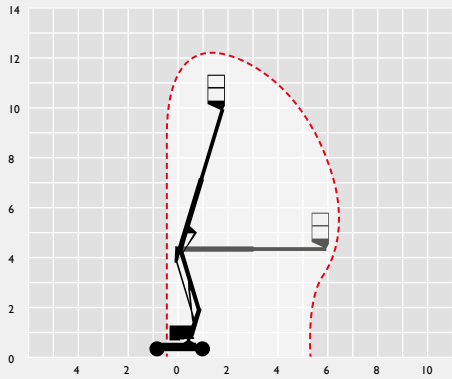

BA45NBS 15.40m

REACH HEIGHT	15.40m	PLATFORM HEIGHT	13.40m
CLOSED LENGTH	5.00m	CLOSED HEIGHT	2.10m
WIDTH	1.50m	HORIZONTAL REACH	9.60m
LIFTING CAPACITY	225kg	WEIGHT	6,680kg
CAGE DIMENSIONS	0.70x1.50m	TURNING RADIUS	4.40m
ROTATION	360°	IPAF CATEGORY	3b


POWER **BI-ENERGY**
 FEATURED MODEL NIFTYLIFT HR15N ALTERNATIVE MODEL NIFTYLIFT HR15N (SIOPS)

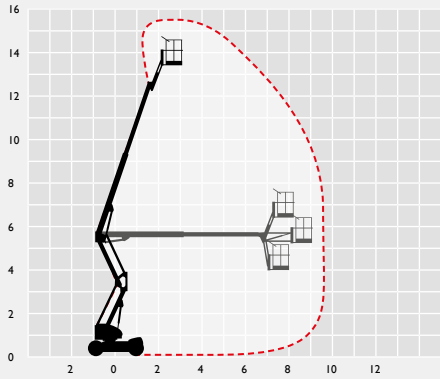

BA63BS 20.80m

REACH HEIGHT	20.80m	PLATFORM HEIGHT	18.80m
CLOSED LENGTH	6.50m	CLOSED HEIGHT	2.15m
WIDTH	2.27m	HORIZONTAL REACH	12.80m
LIFTING CAPACITY	225kg	WEIGHT	6,500kg
CAGE DIMENSIONS	0.85x1.80m	TURNING RADIUS	3.15m
ROTATION	360°	IPAF CATEGORY	3b


POWER **BI-ENERGY**
 FEATURED MODEL NIFTYLIFT HR21 HYBRID (SIOPS) ALTERNATIVE MODEL NIFTYLIFT HR21 HYBRID

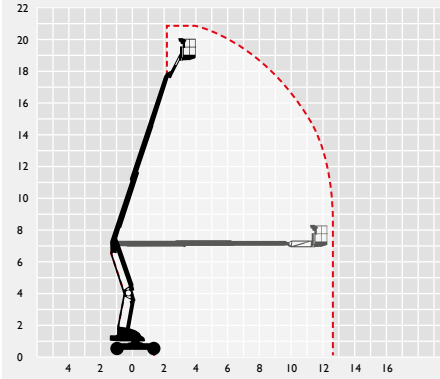

BA45BS 15.72m

REACH HEIGHT	15.72m	PLATFORM HEIGHT	13.72m
CLOSED LENGTH	6.50m	CLOSED HEIGHT	2.01m
WIDTH	1.75m	HORIZONTAL REACH	7.24m
LIFTING CAPACITY	227kg	WEIGHT	6,532kg
CAGE DIMENSIONS	0.76x1.52m	TURNING RADIUS	3.15m
ROTATION	355°	IPAF CATEGORY	3b


POWER **BI-ENERGY**
 FEATURED MODEL GENIE Z45/25BJ ALTERNATIVE MODEL JLG M450AJ

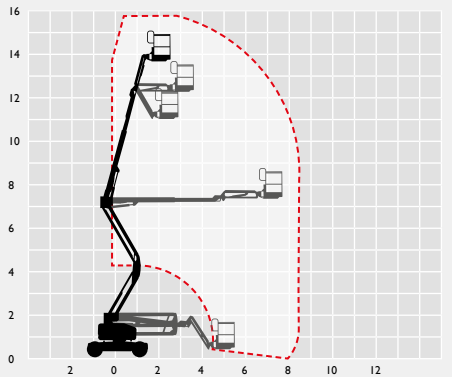

BA50BS 17.20m


REACH HEIGHT	17.20m	PLATFORM HEIGHT	15.20m
CLOSED LENGTH	6.30m	CLOSED HEIGHT	2.10m
WIDTH	1.50m	HORIZONTAL REACH	9.60m
LIFTING CAPACITY	225kg	WEIGHT	7,200kg
CAGE DIMENSIONS	0.70x1.50m	TURNING RADIUS	4.40m
ROTATION	360°	IPAF CATEGORY	3b

POWER **BI-ENERGY**
 FEATURED MODEL NIFTYLIFT HR17N (SIOPS)

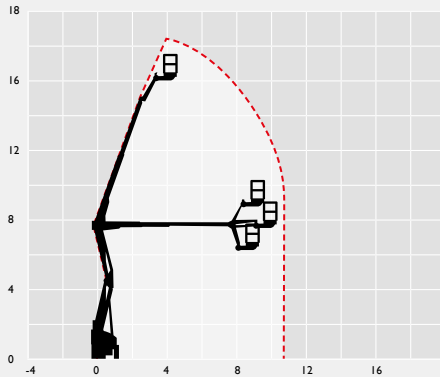


BS46DS 15.45m

REACH HEIGHT	15.45m	PLATFORM HEIGHT	13.45m
CLOSED LENGTH	8.44m	CLOSED HEIGHT	2.22m
WIDTH	2.30m	HORIZONTAL REACH	12.30m
LIFTING CAPACITY	230kg	WEIGHT	7,000kg
CAGE DIMENSIONS	0.80x1.80m	TURNING RADIUS	4.80m
ROTATION	360°	IPAF CATEGORY	3b
POWER	DIESEL		
FEATURED MODEL	GENIE S45	ALTERNATIVE MODEL	HAULOTTE H16TPX

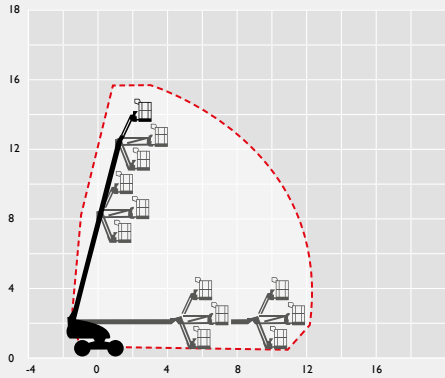


BS65DS 22.12m

REACH HEIGHT	22.12m	PLATFORM HEIGHT	20.12m
CLOSED LENGTH	10.31m	CLOSED HEIGHT	2.56m
WIDTH	2.44m	HORIZONTAL REACH	17.30m
LIFTING CAPACITY	230kg	WEIGHT	13,115kg
CAGE DIMENSIONS	0.91x1.83m	TURNING RADIUS	3.45m
ROTATION	360°	IPAF CATEGORY	3b
POWER	DIESEL		
FEATURED MODEL	JLG 660SJ	ALTERNATIVE MODEL	GENIE S65*

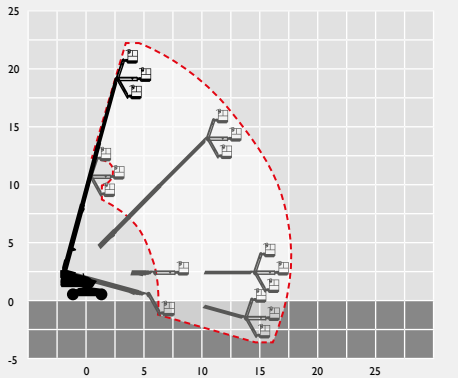


BS125DS 40.15m

REACH HEIGHT	40.15m	PLATFORM HEIGHT	38.15m
CLOSED LENGTH	14.25m	CLOSED HEIGHT	3.07m
TRANSPORT WIDTH	2.49m	WORKING WIDTH	3.35m
LIFTING CAPACITY	227kg	HORIZONTAL REACH	24.68m
CAGE DIMENSIONS	0.76x1.83m	WEIGHT	20,248kg
ROTATION	360°	TURNING RADIUS	13.13m
POWER	DIESEL	IPAF CATEGORY	3b
FEATURED MODEL	GENIE S125		

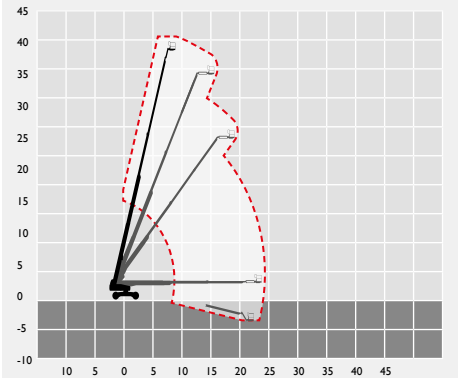


BS135DS 43.15m

REACH HEIGHT	43.15m	PLATFORM HEIGHT	41.15m
CLOSED LENGTH	11.86m	CLOSED HEIGHT	3.05m
TRANSPORT WIDTH	2.49m	WORKING WIDTH	3.81m
LIFTING CAPACITY	227kg	HORIZONTAL REACH	24.38m
CAGE DIMENSIONS	0.91x2.44m	WEIGHT	20,411kg
ROTATION	360°	TURNING RADIUS	6.86m
POWER	DIESEL	IPAF CATEGORY	3b
FEATURED MODEL	JLG 1350SJ		

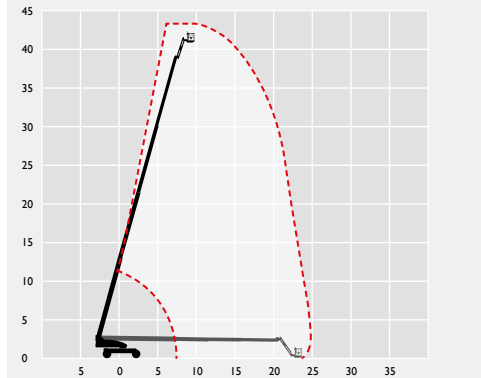


BS86DS 28.21m

REACH HEIGHT	28.21m	PLATFORM HEIGHT	26.21m
CLOSED LENGTH	12.19m	CLOSED HEIGHT	3.05m
WIDTH	2.49m	HORIZONTAL REACH	22.86m
LIFTING CAPACITY	227kg	WEIGHT	16,511kg
CAGE DIMENSIONS	0.91x2.44m	TURNING RADIUS	6.86m
ROTATION	360°	IPAF CATEGORY	3b
POWER	DIESEL		
FEATURED MODEL	JLG 860SJ		

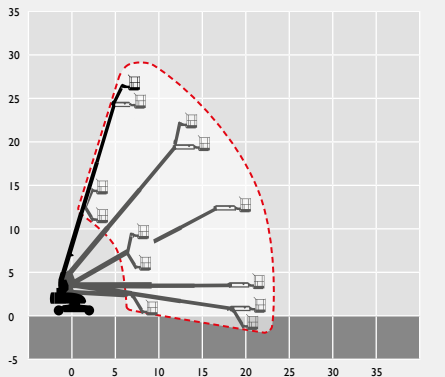


BS120DS 38.73m

REACH HEIGHT	38.73m	PLATFORM HEIGHT	36.73m
CLOSED LENGTH	13.67m	CLOSED HEIGHT	3.05m
TRANSPORT WIDTH	2.49m	WORKING WIDTH	3.81m
LIFTING CAPACITY	227kg	HORIZONTAL REACH	22.86m
CAGE DIMENSIONS	0.91x2.44m	WEIGHT	18,500kg
ROTATION	360°	TURNING RADIUS	5.98m
POWER	DIESEL	IPAF CATEGORY	3b
FEATURED MODEL	JLG 1200SJ		

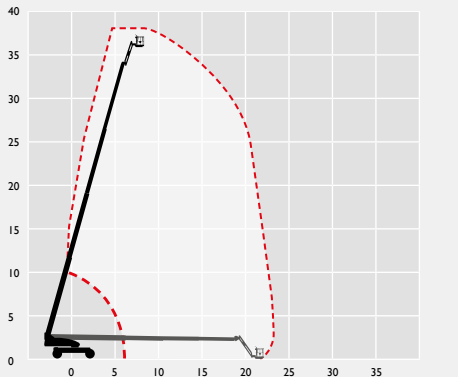


BS150DS 47.70m

REACH HEIGHT	47.70m	PLATFORM HEIGHT	45.70m
CLOSED LENGTH	13.11m	CLOSED HEIGHT	3.05m
TRANSPORT WIDTH	2.49m	WORKING WIDTH	3.81m
LIFTING CAPACITY	227kg	HORIZONTAL REACH	24.38m
CAGE DIMENSIONS	0.91x2.44m	WEIGHT	21,772kg
ROTATION	360°	TURNING RADIUS	5.89m
POWER	DIESEL	IPAF CATEGORY	3b
FEATURED MODEL	JLG 1500SJ		

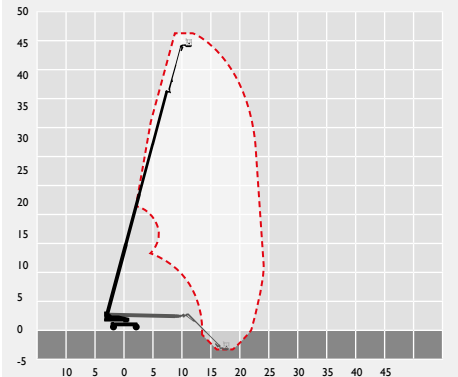

BS180DS 56.68m

REACH HEIGHT	56.68m	PLATFORM HEIGHT	54.68m
CLOSED LENGTH	16.18m	CLOSED HEIGHT	3.05m
TRANSPORT WIDTH	2.49m	HORIZONTAL REACH	21.38m
LIFTING CAPACITY	340kg	WEIGHT	24,948kg
CAGE DIMENSIONS	0.91x2.44m	TURNING RADIUS	7.34m
ROTATION	360°	IPAF CATEGORY	3b
POWER	DIESEL		
FEATURED MODEL	GENIE SX-180		

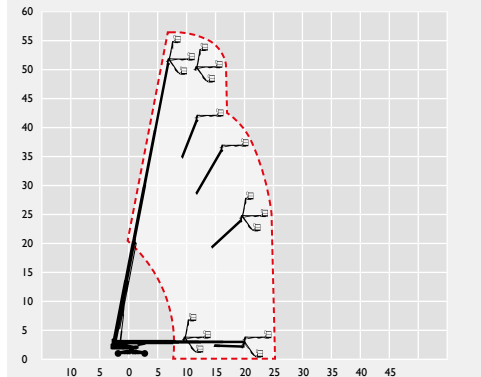


* Model not fitted with electronic secondary guarding. The information provided is for guidance only. It may change at any time in accordance with manufacturer's specification.

TRUCK MOUNTS




TM20C 20.00m

REACH HEIGHT	20.00m	PLATFORM HEIGHT	18.00m
CLOSED LENGTH	6.56m	CLOSED HEIGHT	2.50m
CLOSED WIDTH	2.30m	HORIZONTAL REACH	9.20m
MAX LIFT CAPACITY	200kg	WEIGHT	3,500kg
CAGE DIMENSIONS	1.40x0.70m	MAX WIDTH / VARIABLE	3.20m
CAGE ROTATION	130°	GRADEABILITY	N/A
POWER	DIESEL	IPAF CATEGORY	1b
FEATURED MODEL CTE ZED 20.2			

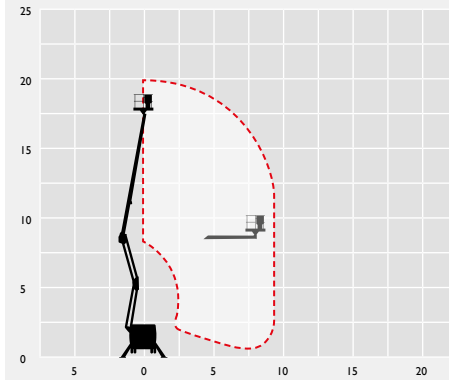


TM20M 20.00m

REACH HEIGHT	20.00m	PLATFORM HEIGHT	18.00m
CLOSED LENGTH	6.65m	CLOSED HEIGHT	2.99m
CLOSED WIDTH	2.05m	HORIZONTAL REACH	12.50m
MAX LIFT CAPACITY	225kg	WEIGHT	3,500kg
CAGE DIMENSIONS	1.40x0.70m	MAX WIDTH / VARIABLE	2.75m
CAGE ROTATION	180°	GRADEABILITY	N/A
POWER	DIESEL	IPAF CATEGORY	1b
FEATURED MODEL MULTITEL Mj201			

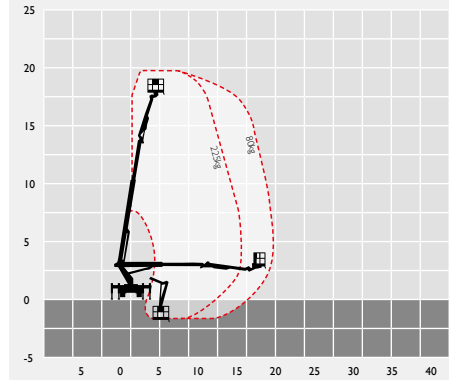


TM21CH 20.70m

REACH HEIGHT	20.70m	PLATFORM HEIGHT	18.70m
CLOSED LENGTH	6.68m	CLOSED HEIGHT	2.60m
CLOSED WIDTH	2.10m	HORIZONTAL REACH	10.00m
MAX LIFT CAPACITY	300kg	WEIGHT	3,500kg
CAGE DIMENSIONS	0.70x1.40m	MAX WIDTH / VARIABLE	2.96m
CAGE ROTATION	130°	GRADEABILITY	N/A
POWER	DIESEL	IPAF CATEGORY	1b
FEATURED MODEL CTE ZED 21JH			

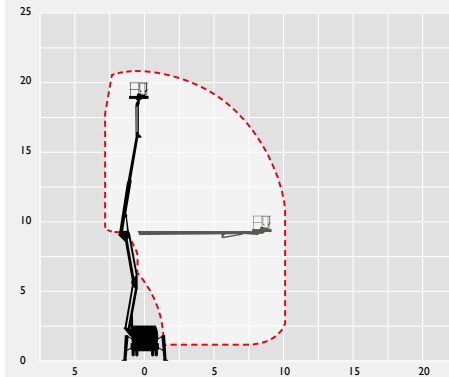

TM21 20.80m

REACH HEIGHT	20.80m	PLATFORM HEIGHT	18.80m
CLOSED LENGTH	6.82m	CLOSED HEIGHT	2.85m
CLOSED WIDTH	2.10m	HORIZONTAL REACH	10.00m
MAX LIFT CAPACITY	200kg	WEIGHT	3,500kg
CAGE DIMENSIONS	0.70x1.40m	MAX WIDTH / VARIABLE	3.02m
CAGE ROTATION	130°	GRADEABILITY	N/A
POWER	DIESEL	IPAF CATEGORY	1b
FEATURED MODEL CTE ZED 21J			

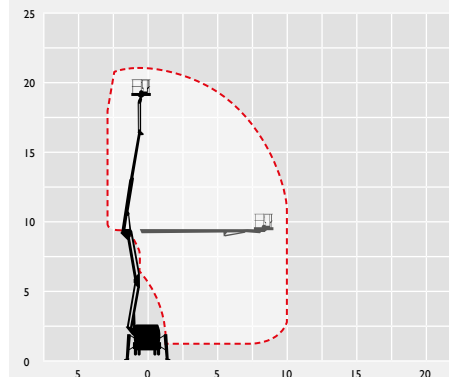


* Operated trucks only. The information provided is for guidance only. It may change at any time in accordance with manufacturer's specification. Outreach is variable depending on load, angle of rotation and outrigger configuration.

TM21C 20.70m

REACH HEIGHT	20.70m	PLATFORM HEIGHT	18.70m
CLOSED LENGTH	6.68m	CLOSED HEIGHT	2.60m
CLOSED WIDTH	2.09m	HORIZONTAL REACH	9.90m
MAX LIFT CAPACITY	280kg	WEIGHT	3,500kg
CAGE DIMENSIONS	0.70x1.40m	MAX WIDTH / VARIABLE	2.96m
CAGE ROTATION	180°	GRADEABILITY	N/A
POWER	DIESEL	IPAF CATEGORY	1b


FEATURED MODEL
CTE ZED 21.2jH

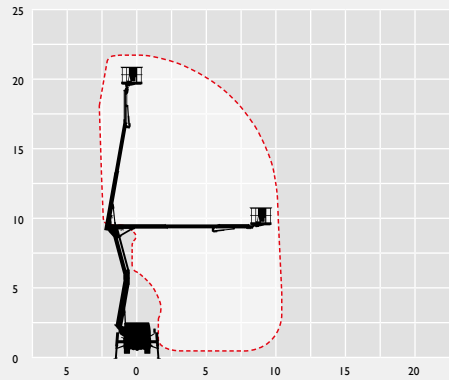

TM22 22.00m

REACH HEIGHT	22.00m	PLATFORM HEIGHT	20.00m
CLOSED LENGTH	8.82m	CLOSED HEIGHT	3.53m
CLOSED WIDTH	2.40m	HORIZONTAL REACH	17.20m
MAX LIFT CAPACITY	280kg	WEIGHT	8,000kg
CAGE DIMENSIONS	0.80x1.80m	MAX WIDTH / VARIABLE	5.00m
CAGE ROTATION	155°	GRADEABILITY	N/A
POWER	DIESEL	IPAF CATEGORY	1b


FEATURED MODEL
GSR 228j

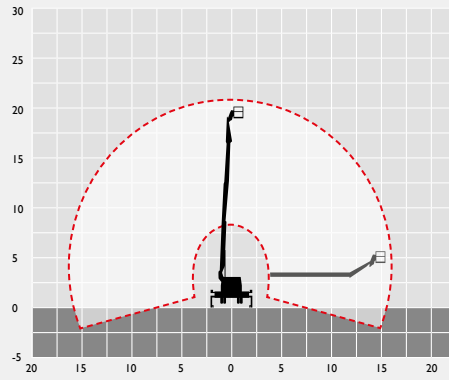

TM30P 30.00m

REACH HEIGHT	30.00m	PLATFORM HEIGHT	28.00m
CLOSED LENGTH	9.07m	CLOSED HEIGHT	3.50m
CLOSED WIDTH	9.07m	HORIZONTAL REACH	20.90m
MAX LIFT CAPACITY	350kg	WEIGHT	7,490kg
CAGE DIMENSIONS	1.80x0.80m	MAX WIDTH WORKING	5.00m
CAGE ROTATION	170°	GRADEABILITY	N/A
POWER	DIESEL	IPAF CATEGORY	1b


FEATURED MODEL
PALFINGER P300

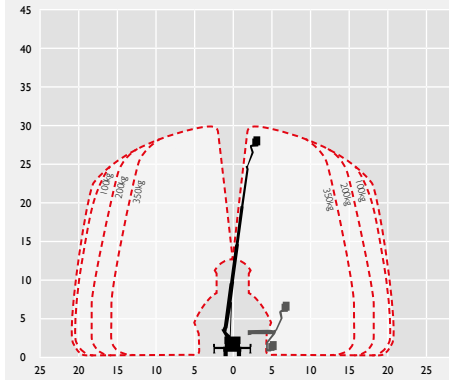

TM32 32.00m

REACH HEIGHT	32.00m	PLATFORM HEIGHT	30.00m
CLOSED LENGTH	8.40m	CLOSED HEIGHT	3.53m
CLOSED WIDTH	2.50m	HORIZONTAL REACH	25.50m
MAX LIFT CAPACITY	600kg	WEIGHT	12,000kg
CAGE DIMENSIONS	3.88x1.05m	MAX WIDTH WORKING	6.20m
CAGE ROTATION	170°	GRADEABILITY	N/A
POWER	DIESEL	IPAF CATEGORY	1b*


FEATURED MODEL
PALFINGER P320

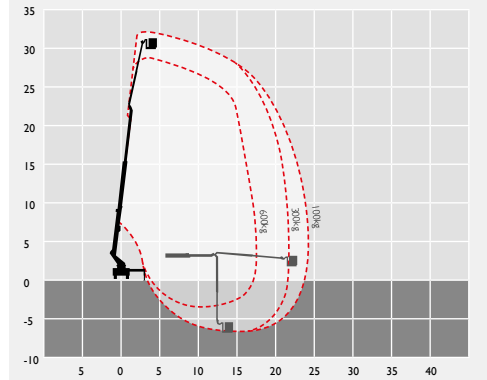

TM26 26.00m

REACH HEIGHT	26.00m	PLATFORM HEIGHT	24.00m
CLOSED LENGTH	7.70m	CLOSED HEIGHT	3.30m
CLOSED WIDTH	2.50m	HORIZONTAL REACH	14.00m
MAX LIFT CAPACITY	230kg	WEIGHT	7,500kg
CAGE DIMENSIONS	0.70x1.80m	MAX WIDTH / VARIABLE	2.80m
CAGE ROTATION	130°	GRADEABILITY	N/A
POWER	DIESEL	IPAF CATEGORY	1b


FEATURED MODEL
CTE ZED 26jH

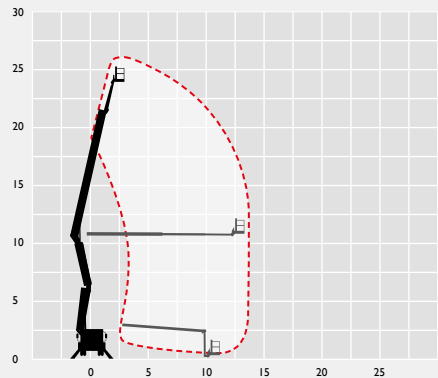

TM30W 30.00m

REACH HEIGHT	30.00m	PLATFORM HEIGHT	28.00m
CLOSED LENGTH	8.65m	CLOSED HEIGHT	3.50m
CLOSED WIDTH	2.50m	HORIZONTAL REACH	19.50m
MAX LIFT CAPACITY	320kg	WEIGHT	7,500kg
CAGE DIMENSIONS	0.80x1.60m	MAX WIDTH / VARIABLE	5.00m
CAGE ROTATION	160°	GRADEABILITY	N/A
POWER	DIESEL	IPAF CATEGORY	1b


FEATURED MODEL
WUMAG WT300

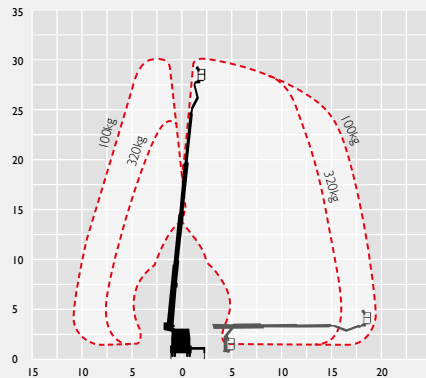

TM33 33.00m

REACH HEIGHT	33.00m	PLATFORM HEIGHT	31.00m
CLOSED LENGTH	8.79m	CLOSED HEIGHT	3.56m
CLOSED WIDTH	2.50m	HORIZONTAL REACH	21.20m
MAX LIFT CAPACITY	320kg	WEIGHT	7,490kg
CAGE DIMENSIONS	1.70x0.86m	MAX WIDTH WORKING	5.30m
CAGE ROTATION	180°	GRADEABILITY	N/A
POWER	DIESEL	IPAF CATEGORY	1b


FEATURED MODEL
RUTHMANN STEIGER T330

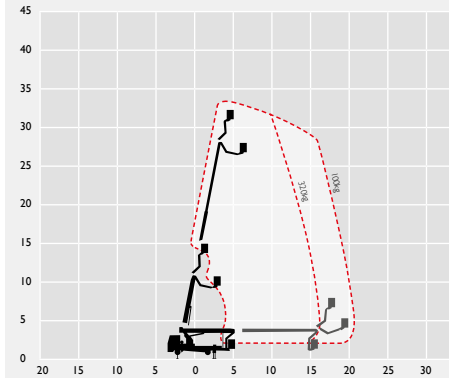

TM35 35.00m

REACH HEIGHT	35.00m	PLATFORM HEIGHT	33.00m
CLOSED LENGTH	9.20m	CLOSED HEIGHT	3.50m
CLOSED WIDTH	2.50m	HORIZONTAL REACH	29.30m
MAX LIFT CAPACITY	350kg	WEIGHT	18,000kg
CAGE DIMENSIONS	0.80x1.80m	MAX WIDTH / VARIABLE	6.25m
CAGE ROTATION	160°	GRADEABILITY	N/A
POWER	DIESEL	IPAF CATEGORY	1b*

FEATURED MODEL
WUMAG WT350

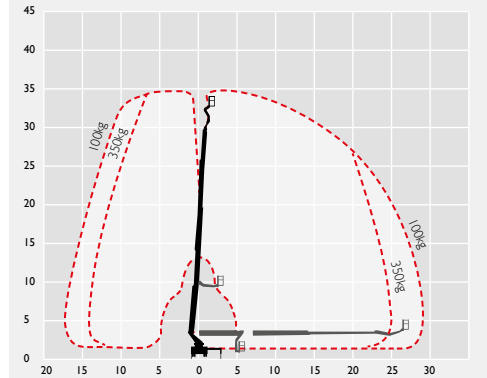


* Operated trucks only. The information provided is for guidance only. It may change at any time in accordance with manufacturer's specification. Outreach is variable depending on load, angle of rotation and outrigger configuration.

TM37 37.00m

REACH HEIGHT	37.00m	PLATFORM HEIGHT	35.00m
CLOSED LENGTH	9.55m	CLOSED HEIGHT	3.70m
CLOSED WIDTH	2.50m	HORIZONTAL REACH	29.50m
MAX LIFT CAPACITY	700kg	WEIGHT	18,000kg
CAGE DIMENSIONS	1.05x2.40m	MAX WIDTH / VARIABLE	6.20m
CAGE ROTATION	160°	GRADEABILITY	8%
POWER	DIESEL	IPAF CATEGORY	1b


FEATURED MODEL
WUMAG WT370

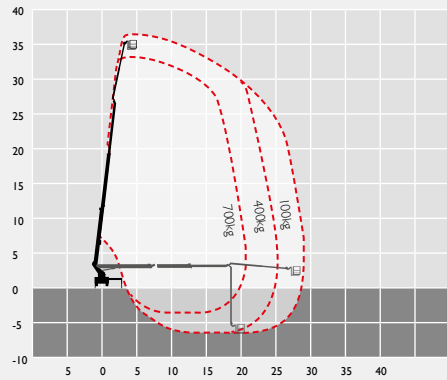

TM38 38.00m

REACH HEIGHT	38.00m	PLATFORM HEIGHT	36.00m
CLOSED LENGTH	10.00m	CLOSED HEIGHT	3.70m
CLOSED WIDTH	2.50m	HORIZONTAL REACH	26.00m
MAX LIFT CAPACITY	600kg	WEIGHT	18,000kg
CAGE DIMENSIONS	3.70x1.10m	MAX WIDTH / VARIABLE	6.20m
CAGE ROTATION	180°	GRADEABILITY	N/A
POWER	DIESEL	IPAF CATEGORY	1b


FEATURED MODEL
BRONTO SKYLIFT S38 XDT

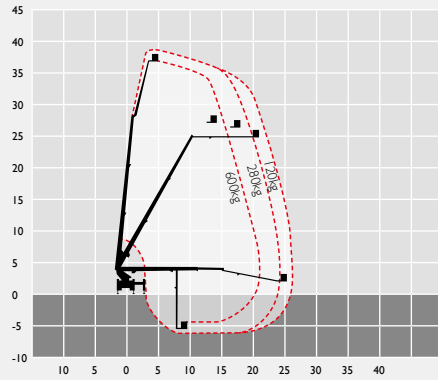

TM57 57.00m

REACH HEIGHT	57.00m	PLATFORM HEIGHT	55.00m
CLOSED LENGTH	11.90m	CLOSED HEIGHT	3.90m
CLOSED WIDTH	2.51m	HORIZONTAL REACH	41.00m
MAX LIFT CAPACITY	600kg	WEIGHT	26,000kg
CAGE DIMENSIONS	3.81x1.04m	WIDTH MAX WORKING	12.50m
CAGE ROTATION	400°	WIDTH MIN WORKING	2.50m variable
POWER	DIESEL	IPAF CATEGORY	1b*


FEATURED MODEL
PALFINGER P570

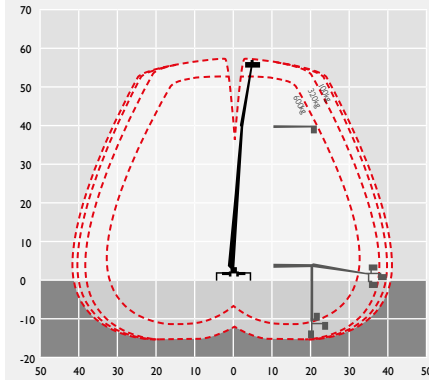

TM45 45.00m

REACH HEIGHT	45.00m	PLATFORM HEIGHT	43.00m
CLOSED LENGTH	10.00m	CLOSED HEIGHT	3.80m
CLOSED WIDTH	2.50m	HORIZONTAL REACH	28.70m
MAX LIFT CAPACITY	600kg	WEIGHT	18,000kg
CAGE DIMENSIONS	3.88x1.05m	MAX WIDTH / VARIABLE	6.20m
CAGE ROTATION	160°	GRADEABILITY	N/A
POWER	DIESEL	IPAF CATEGORY	1b*


FEATURED MODEL
WUMAG WT450

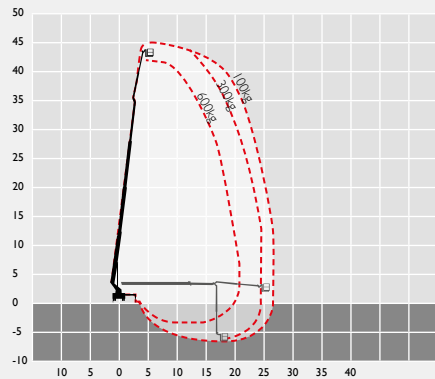

TM48 48.00m

REACH HEIGHT	48.00m	PLATFORM HEIGHT	46.00m
CLOSED LENGTH	9.90m	CLOSED HEIGHT	3.93m
CLOSED WIDTH	2.50m	HORIZONTAL REACH	28.00m
MAX LIFT CAPACITY	600kg	WEIGHT	18,000kg
CAGE DIMENSIONS	1.10x3.88m	MAX WIDTH WORKING	5.075m
CAGE ROTATION	400°	MIN WIDTH WORKING	2.50m variable
POWER	DIESEL		

IPAF CATEGORY
1b*
FEATURED MODEL
PALFINGER P480

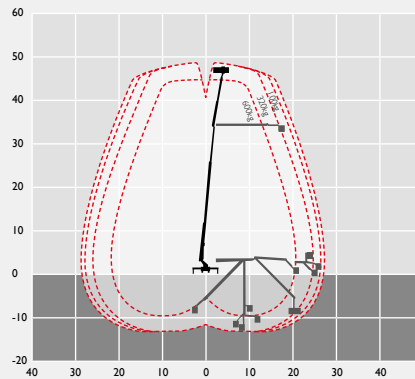

* Operated trucks only. The information provided is for guidance only. It may change at any time in accordance with manufacturer's specification. Outreach is variable depending on load, angle of rotation and outrigger configuration.

TRACK MOUNTS


ELECTRIC, DIESEL & BI-FUEL



TR14 14.00m

REACH HEIGHT	14.00m	PLATFORM HEIGHT	12.00m
CLOSED LENGTH	4.06m	CLOSED HEIGHT	1.98m
CLOSED WIDTH	1.08m	HORIZONTAL REACH	7.00m
LIFTING CAPACITY	120-200kg	WEIGHT	1,700kg
CAGE DIMENSIONS	1.34x0.69m	GRADEABILITY	31.5%
CAGE ROTATION	Fixed	IPAF CATEGORY	1b
POWER	ELECTRIC/DIESEL		


FEATURED MODEL
HINOWA GOLDLIFT 14.70

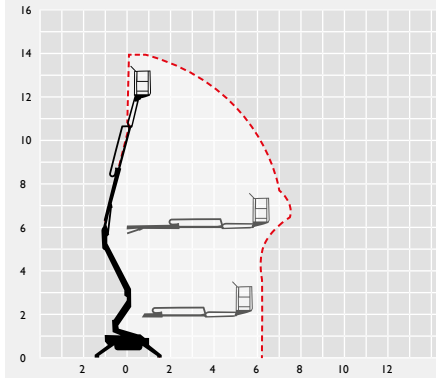

TR17H 17.06m

REACH HEIGHT	17.06m	PLATFORM HEIGHT	15.06m
CLOSED LENGTH	4.52m	CLOSED HEIGHT	1.99m
CLOSED WIDTH	1.08m	HORIZONTAL REACH	7.50m
LIFTING CAPACITY	230kg	WEIGHT	2,230kg
CAGE DIMENSIONS	1.30x0.65m	GRADEABILITY	28.7%
CAGE ROTATION	124°	IPAF CATEGORY	1b
POWER	ELECTRIC/DIESEL		


FEATURED MODEL
HINOWA GOLDLIFT 17.75

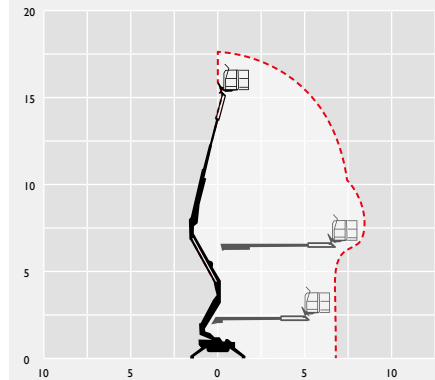

TR17E 17.50m

REACH HEIGHT	17.50m	PLATFORM HEIGHT	15.50m
CLOSED LENGTH	4.90m	CLOSED HEIGHT	2.00m
CLOSED WIDTH	0.90m	HORIZONTAL REACH	7.50m
LIFTING CAPACITY	200kg	WEIGHT	2,200kg
CAGE DIMENSIONS	0.70x1.40m	GRADEABILITY	30%
CAGE ROTATION	180°	IPAF CATEGORY	1b
POWER	BI-FUEL		


FEATURED MODEL
EASILIFT R-180

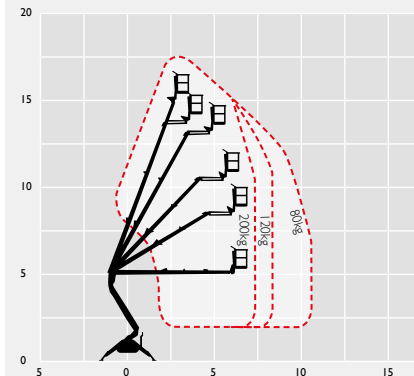

TR18T 17.60m

REACH HEIGHT	17.60m	PLATFORM HEIGHT	15.60m
CLOSED LENGTH	5.12m	CLOSED HEIGHT	1.99m
CLOSED WIDTH	0.78m	HORIZONTAL REACH	7.40m
LIFTING CAPACITY	200kg	WEIGHT	2,400kg
CAGE DIMENSIONS	0.70x1.42m	GRADEABILITY	35.5%
CAGE ROTATION	N/A	IPAF CATEGORY	1b
POWER	ELECTRIC/DIESEL		

FEATURED MODEL
TEUPEN LEO 18GT

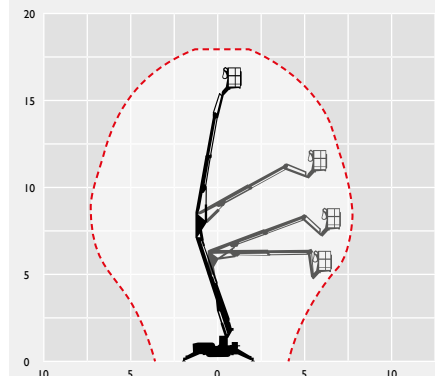


The information provided is for guidance only. It may change at any time in accordance with manufacturer's specification. Variable Jacking will affect working envelope. Outreach is variable depending on load, angle of rotation and outrigger configuration.

TR19 18.50m

REACH HEIGHT	18.50m	PLATFORM HEIGHT	16.50m
CLOSED LENGTH	4.90m	CLOSED HEIGHT	1.98m
CLOSED WIDTH	0.89m	HORIZONTAL REACH	11.00m
LIFTING CAPACITY	200kg	WEIGHT	2,800kg
CAGE DIMENSIONS	0.70x1.40m	GRADEABILITY	30%
CAGE ROTATION	180°	IPAF CATEGORY	1b
POWER	BI-FUEL		


FEATURED MODEL
EASILIFT R-190

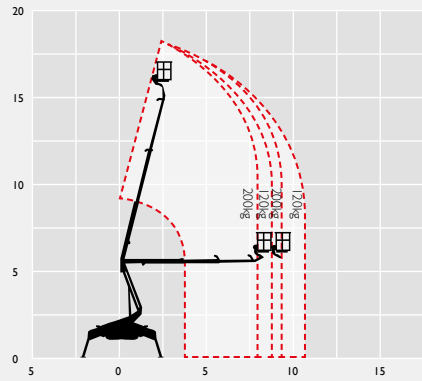

TR21C 21.00m

REACH HEIGHT	21.00m	PLATFORM HEIGHT	19.00m
CLOSED LENGTH	5.25m	CLOSED HEIGHT	1.98m
CLOSED WIDTH	0.97m	HORIZONTAL REACH	10.80m
LIFTING CAPACITY	200kg	WEIGHT	3,130kg
CAGE DIMENSIONS	1.50x0.70m	GRADEABILITY	28%
CAGE ROTATION	180°	IPAF CATEGORY	1b
POWER	ELECTRIC		

FEATURED MODEL
C22/11 LITHIUM

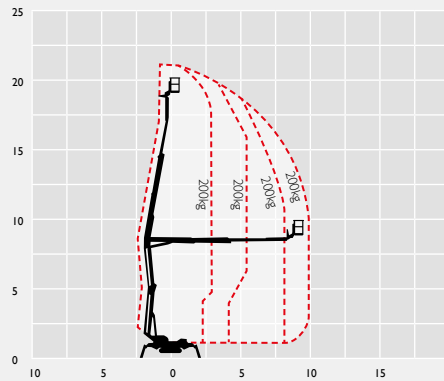


TR23T 23.00m

REACH HEIGHT	23.00m	PLATFORM HEIGHT	21.00m
CLOSED LENGTH	6.20m	CLOSED HEIGHT	1.97m
CLOSED WIDTH	0.98m	HORIZONTAL REACH	11.20m
LIFTING CAPACITY	200kg	WEIGHT	2,990kg
CAGE DIMENSIONS	0.70x1.40m	GRADEABILITY	30%
CAGE ROTATION	180°	IPAF CATEGORY	1b
POWER	ELECTRIC/DIESEL		

FEATURED MODEL
TEUPEN LEO 23GT


ALTERNATIVE MODEL
CTE TRACCESS 230

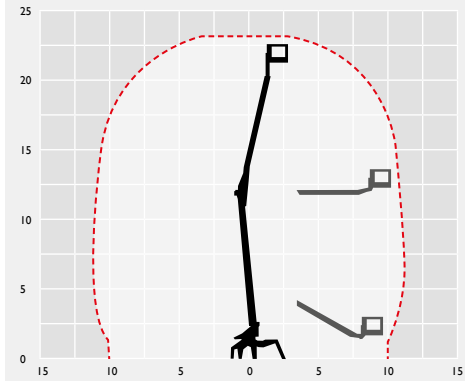

TR29 29.00m

REACH HEIGHT	29.00m	PLATFORM HEIGHT	27.00m
CLOSED LENGTH	6.30m	CLOSED HEIGHT	1.98m
CLOSED WIDTH	0.80m	HORIZONTAL REACH	14.00m
LIFTING CAPACITY	200kg	WEIGHT	4,030kg
CAGE DIMENSIONS	2.00x0.80m	GRADEABILITY	5%
CAGE ROTATION	180°	IPAF CATEGORY	1b
POWER	BI-FUEL		


FEATURED MODEL
FALCON FS290

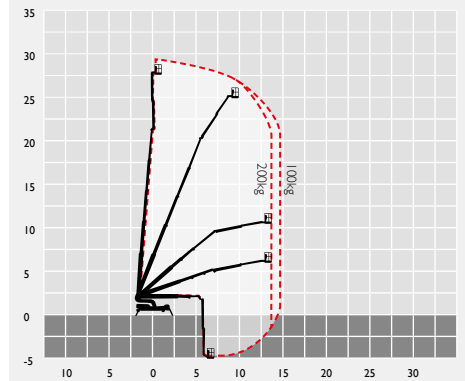

TR21T 21.00m

REACH HEIGHT	21.00m	PLATFORM HEIGHT	19.00m
CLOSED LENGTH	6.40m	CLOSED HEIGHT	1.99m
CLOSED WIDTH	0.98m	HORIZONTAL REACH	12.00m
LIFTING CAPACITY	250kg	WEIGHT	3,000kg
CAGE DIMENSIONS	1.10x1.20m	GRADEABILITY	30%
CAGE ROTATION	180°	IPAF CATEGORY	1b
POWER	ELECTRIC/DIESEL		


FEATURED MODEL
TEUPEN LEO 21GT

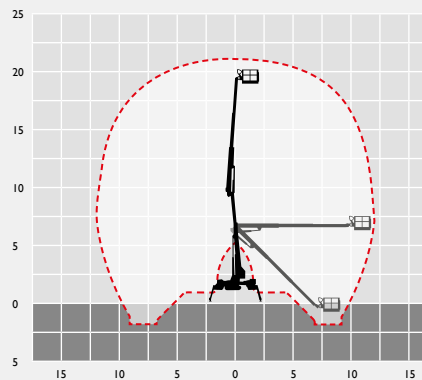

TR23C 23.00m

REACH HEIGHT	23.00m	PLATFORM HEIGHT	21.00m
CLOSED LENGTH	5.33m	CLOSED HEIGHT	2.10m
CLOSED WIDTH	0.78m	HORIZONTAL REACH	12.00m
LIFTING CAPACITY	200kg	WEIGHT	2,900kg
CAGE DIMENSIONS	1.30x0.70m	GRADEABILITY	31%
CAGE ROTATION	180°	IPAF CATEGORY	1b
POWER	ELECTRIC/DIESEL		


FEATURED MODEL
CTE TRACCESS 230

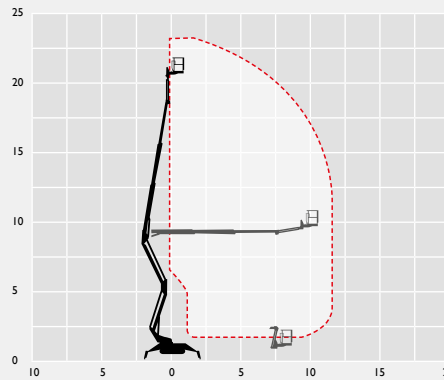

TR30 30.00m

REACH HEIGHT	30.00m	PLATFORM HEIGHT	28.00m
CLOSED LENGTH	7.20m	CLOSED HEIGHT	1.98m
CLOSED WIDTH	1.58m	HORIZONTAL REACH	15.70m
LIFTING CAPACITY	200kg	WEIGHT	4,225kg
CAGE DIMENSIONS	0.80x1.20m	GRADEABILITY	30%
CAGE ROTATION	180°	IPAF CATEGORY	1b
POWER	ELECTRIC/DIESEL		

FEATURED MODEL
TEUPEN LEO 30T

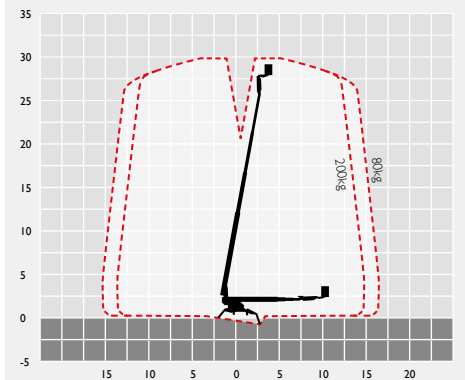

The information provided is for guidance only. It may change at any time in accordance with manufacturer's specification. Variable jacking will affect working envelope. Outreach is variable depending on load, angle of rotation and outrigger configuration.

GOODS & PASSENGER HOISTS & ACCESSORIES




We can offer a free site survey for power installations and are able to provide temporary power solutions for your hoist and site cabins.

GH19 19.00m

MAX HEIGHT	19.00m	LIFTING CAPACITY	150kg
LIFTING SPEED	27m/min		
POWER	ELECTRIC 110v 1.1kw 50hz		

FEATURED MODEL
GEDA INCLINED ELEVATOR



GH25 25.00m

MAX HEIGHT	25.00m	LIFTING CAPACITY	200kg
MACHINE WEIGHT	45kg	LIFTING SPEED	19m/min
POWER	ELECTRIC 110v 14amps 50hz		

FEATURED MODEL
IMER TR-225 HOIST



GH30 30.00m

MAX HEIGHT	30.00m	LIFTING CAPACITY	200kg
PERSON CAPACITY	Goods only	CAGE DIMENSIONS	0.76x1.10m
LIFT SPEED	25.00m/min		
POWER	ELECTRIC 230v 1.3kw 50hz		


FEATURED MODEL
GEDA 200Z



GH50SB 50.00m (Single Barrow)


MAX HEIGHT	50.00m	LIFTING CAPACITY	300kg
PERSON CAPACITY	Goods only	CAGE DIMENSIONS	0.70x1.40m
LIFT SPEED	20.00m/min		
POWER	ELECTRIC 230v 7.7amps 50hz		

FEATURED MODEL
GEDA 300Z

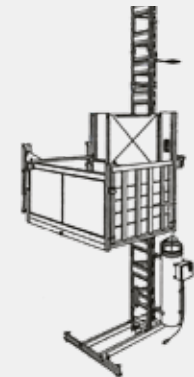


GH50DB 50.00m (Double Barrow)

MAX HEIGHT	50.00m	LIFTING CAPACITY	300kg
LIFT SPEED	13.00m/min	CAGE DIMENSIONS	1.40x1.70m
POWER	ELECTRIC 230v 9.1amps 50hz		
FEATURED MODEL	GEDA 300Z		

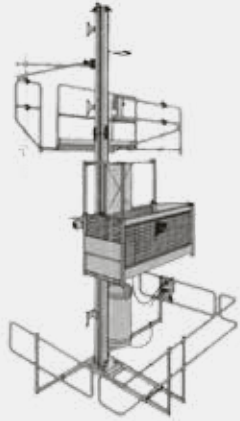


GH100 100.00m

MAX HEIGHT	100.00m	LIFTING CAPACITY	500kg
PERSON CAPACITY	Goods only	CAGE DIMENSIONS	1.40x1.70m
LIFT SPEED	30.00m/min		
POWER	ELECTRIC 400v 13.8amps 50hz		
FEATURED MODEL	GEDA 500Z		

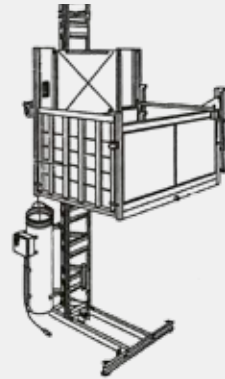

GH100ZZP 100.00m

MAX HEIGHT	100.00m	AXEL WIDTH	2.10m
LIFTING CAPACITY	850kg	PERSON CAPACITY	5
CAGE DIMENSIONS	1.40x1.70m	LIFT SPEED GOODS	24.00m/min
LIFT SPEED PERSON	12.00m/min		
POWER	ELECTRIC 400v 13.8amps 50hz		
FEATURED MODEL	GEDA 850Z/ZP		

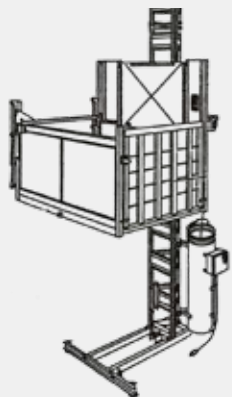


ACCESSORIES



BRICK CAGE

Brick cages are used as a safe method of lifting bricks weighing up to 200kg to height when using Scaffold and Gantry hoists such as the Imer 225kg and 300kg Geda Gantry.

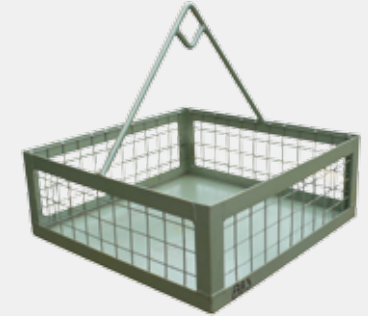

LIFTING BARROW

The lifting barrow can carry up to 200kg when using Scaffold and Gantry hoists such as the Imer 225kg and 300kg Geda Gantry. The lifting barrow is designed for lifting equipment such as sand or cement to height and for removing general debris from site.





WORKING AT HEIGHT TRAINING

IPAF

Successful trainees receive a Certificate and Powered Access Licence (PAL Card), a safety guide and log book. We fully support IPAF in promoting the safe and effective use of powered access equipment, so when booking IPAF training courses, it is essential you refer to the official IPAF guidance document - IPAF Health and Fitness Statement.

IPAF OPERATOR

IPAF PAL+

IPAF PUSH AROUND VERTICAL

IPAF MEWPS FOR MANAGERS

IPAF HARNESS

PASMA

PASMA certified training is universally acknowledged as the definitive standard for alloy towers, with the PASMA training Code of Practice being updated to incorporate the requirements of the Work at Height Regulations 2005. All five of our PASMA accredited courses meet and cover the above standards giving you the confidence you need to book with us.

PASMA TOWERS FOR USERS

PASMA LOW LEVEL ACCESS

PASMA WORKING AT HEIGHT ESSENTIALS

PASMA COMBINED LOW LEVEL ACCESS & TOWERS FOR USERS

PASMA TOWERS ON STAIRS



SITE SAFETY

Heavy plant and machinery operate on this site

Caution
Fork lift trucks operating

Reversing in and out of site is strictly forbidden

ehicles must not enter site without authority of site supervisor

TORS MUST REPORT



Hard hats must be worn on site at all times



High visibility clothing must be worn on site at all times



Safety boots must be worn on site at all times



SAFETY RELATED TRAINING

NEW ROADS & STREET WORKS

All New Roads and Street Works (NRSWA) courses we offer are in line with The New Roads and Street Works Act 1991.

NRSWA OPERATORS
UNITS 1-6 & 9 OR UNITS 1-7 & 9

NRSWA SUPERVISORS
UNITS 1 & 10-14 AND 16

NRSWA RE-ASSESSMENT

NRSWA OPERATORS HOT LAY UNIT 7

NRSWA SIGNING, LIGHTING & GUARDING RE-ASSESSMENT (OPERATORS OR SUPERVISORS)

LOCATION & AVOIDANCE OF UNDERGROUND APPARATUS (CAT & GENNY)

NRSWA SIGNING, LIGHTING & GUARDING UNIT 2 (OPERATORS)

NRSWA SIGNING, LIGHTING & GUARDING UNIT 10 (SUPERVISORS)

NEBOSH

We offer in depth knowledge to the management of health & safety, legislation, law and the hazards associated and required control measures. NEBOSH is a globally recognised health & safety qualification that is held by more than 100,000 people in the UK and worldwide.

NEBOSH NATIONAL GENERAL CERTIFICATE IN OCCUPATIONAL HEALTH & SAFETY

NEBOSH NATIONAL CERTIFICATE IN CONSTRUCTION HEALTH & SAFETY

NEBOSH CERTIFICATE IN ENVIRONMENTAL MANAGEMENT

IOSH

The IOSH Working Safely course is an ideal introduction to health & safety from an employee perspective. IOSH Managing Safely is a brilliant introduction to the management of health & safety, law, legislation and the hazards associated and required control measures.

IOSH MANAGING SAFELY

IOSH WORKING SAFELY

CITB

The Construction Industry Training Board (CITB) Site Safety Plus Scheme, provides the building, civil engineering and related industries with a range of courses for people looking to develop skills in this area.

CITB SITE MANAGEMENT SAFETY TRAINING SCHEME (SMSTS)

CITB SITE MANAGEMENT SAFETY TRAINING SCHEME (SMSTS) REFRESHER

CITB SITE SUPERVISOR SAFETY TRAINING SCHEME (SSSTS)

CITB SITE SUPERVISOR SAFETY TRAINING SCHEME (SSSTS) REFRESHER

CITB HEALTH & SAFETY AWARENESS

CITB SITE ENVIRONMENTAL AWARENESS TRAINING SCHEME (SEATS)

CITB ACHIEVING BEHAVIOURAL CHANGE (ABC)



MACHINE SALES

Rapid Platforms offer new and used access equipment for sale at great prices. We have an extensive range of machines available from some of the most respected manufacturers in the industry, giving you peace of mind and quality assurance when you buy from us.

We have a vast range of new and used machines available, but if you need to buy a specific machine that is not on our list, we can source what you need.



WE CAN SUPPLY

- TRUCK MOUNTS**
- TRACK MOUNTS**
- SCISSOR LIFTS**
- BOOM LIFTS**

Our experienced consultants are the best in the industry, and we always aim to match your need with the correct machine; this commitment is complemented by our quality after sales backup, IPAF training and LOLER servicing packages.

SERVICING

We have an experienced and qualified team of workshop and mobile engineers and can offer a wide range of servicing solutions on work platforms, hoists and other equipment.

Our services include carrying out after sales support, servicing, repairs, thorough examinations and relevant MEWP specific inspections.



WE OFFER

- MEWP AND HOIST SMA'S**
- THOROUGH INSPECTIONS (LOLER)**
- SAFE WORKING LOAD TESTS**
- MINOR AND MAJOR REPAIRS**
- ROUTINE SERVICING**
- FULLY CERTIFIED SERVICES**

Rapid Platforms acts as a full range distributor for several major manufacturers covering all categories of MEWP, and also offer a wide range of second-hand access equipment for sale. Our Service & Thorough Examination package proves excellent value for money, protecting your initial investment.



London Road, Spellbrook, Bishop's Stortford, Hertfordshire, CM23 4AU
t 01279 501501 e info@rapidplatforms.co.uk w rapidplatforms.co.uk